# iomabe

# BOTTOM FREEZER



PRODUCTSHEET

ICO19JSPR 30

ICO19JSPR L 30







### **SERIES ICO19JSPR**

#### STAINLESS STEEL



standard built-in doors in stainless steel straight corners 'Café' handles in stainless steel

left handed door ICO 19JSPR L 30


right handed door ICO 19JSPR 30



\* ALSO AVAILABLE WITH LEFT HAND DOOR

#### INSIDE

# io mabe

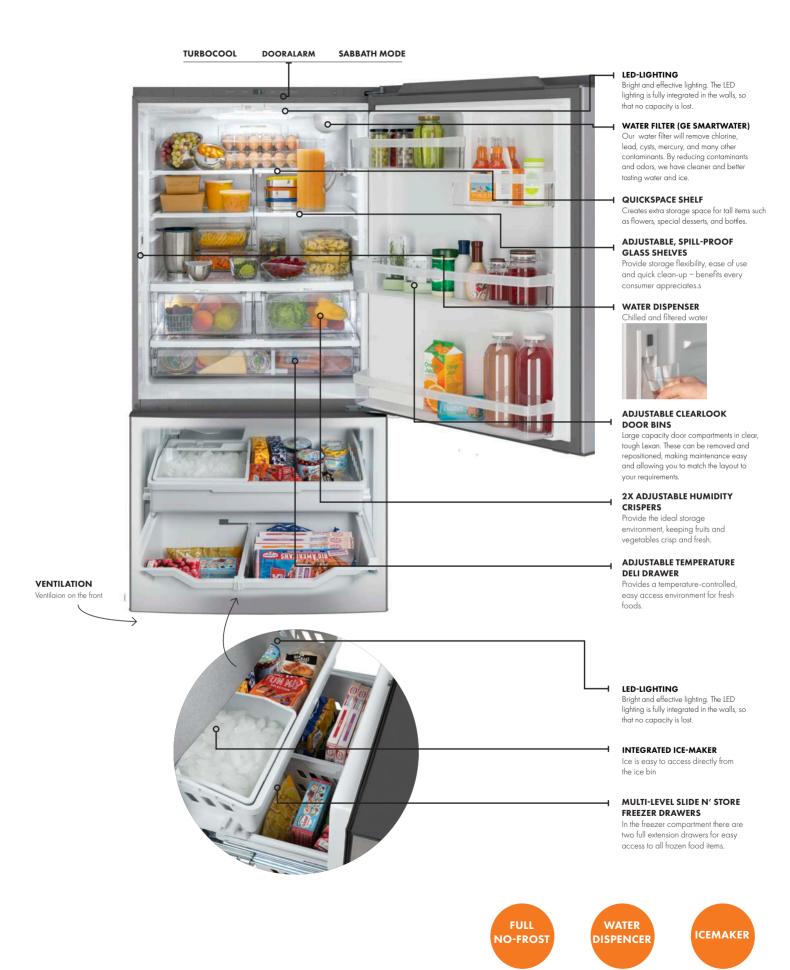

## NO FROST MET FROSTGUARD-TECHNOLOGIE

No Frost ventilated cooling guarantees homogeneous temperatures which enable you to store your food better and freeze it more efficiently. The FrostGuard technology makes automatic defrosting a lot more convenient. Your refrigerator will only defrost when it is necessary on the basis of precise measurements (e.g. on the basis of the number of freezer door openings, compressor running time etc.). FrostGuard also prevents frozen food from partly defrosting during the defrost cycle by performing extra chilling as low as -30°C (pre-chill) just before defrosting and by keeping the complete defrost cycle very short. This considerably reduces the risk of freezer burn. This technology means that food can be stored longer and better, and you no longer need to defrost manually.



#### MULTIFLOW AIR SYSTEM TECHNOLOGIE



In order to keep your food fresh for as long as possible, these technologies ensure a uniform and precise temperature in each of the refrigerator's compartments. This is achieved by fitting sensitive electronic sensors, an air tunnel across various levels and fans linked to the most advanced electronics. This considerably improves the quality and storage life of your food. The electronic controls enable you to independently monitor the refrigerator and freezer temperatures, as a result of which the temperature differences are smaller and your food will remain fresher and can be stored for longer. When you close the door of your refrigerator or freezer, it will only take a few minutes to return to the programmed temperatures

#### **ENERGYSMART**

Improved features such as the electronic sensors and FrostGuard mean that iomabe refrigerators have a much better energy consumption. They save a great deal of energy compared to appliances from earlier generations. Thanks to this technology these American refrigerators perform exceptionally well in their energy class without affecting the quality of chilling, storage and freezing. The entire iomabe collection is in the energy-efficient E class.




A SMART CHOICE


American performance, European design.

Let's make your kitchen cool again!

#### **DIMENSIONS**

#### STANDARD BUILT-IN





Standard built-in		
Series ICO19JSPR	30 - 3RAL 3BM - 3WM	
1. Height to top of case	1742	
2. Height to top of hinge	1772	
3. Height to top of door	1805	
4. Depth of case without door	625	
5. Depth without handles	734	
6. Depth incl. "Cafe" handles	802	
Depth incl. "Design" handles	774	
7. Total depth with door open 90°	1495	
8. Width	840	
9. Width of open door (R)	590	
10. Width of open door (L)	590	
Recess dimensions		
A. Recess width	845	
B. Recess depth*	632	
C. Recess height	1785	

#### TECHNICAL SPECIFICATIONS & FUNCTIONS

functions	ICO 19
Waterdispenser	yes (internal)
Ice-maker (automatc)	yes (internal)
Slide'n Store freezer baskets	2x
Fruit and vegetable drawer with adjustable humidity	2x
Waterfiter GE SmartWater	XWF
ClearLook door bins (adjustable)	4x (2)
Adjustable glass shelves	3x
Adjustable QuickSpace shelf	1x
Draagplateau over de gehle breedte	1x
Afgesloten delicatessenlade (temp. verstelbaar)	1x
Crisp clear LED-lighting (freezer)	yes
Crisp clear LED-lighting refrigirator)	yes
Sabbath mode	yes
Door alarm	yes
Indicator replace waterfilter	yes
TurboCool	yes
Electronic control (including the temperature settings)	yes (internal)


	BottomFreezer
Series	ICO 19
Total Gross/Net (litres)	530
ISO Gross/Net refrigerator compartment (litres)	388
ISO Gross/Net freezer compartment (litres)	142
Energy consumption (kWh/a)	263
Energy class	Е
Climate class	T (16°C - 43°C)
Freezer stars	* * *
Noise level (dB (a))	45
Type of defrosting / automatic	No Frost / ja

# TWIN CONFIGURATION CK-ICO19 "CONNECTION KIT



Two Bottom-Freezer connected with a special connection kit CK-ICO 19 Suitable for standard built-in and US style models.

#### "TWIN" CONFIGURATION



Standard built-in	
Series 2x ICO19JSPR With CK-19 CONNECTION KIT	30 - 3RAL 3BM - 3WM
1. Height to top of case	1742
2. Height to top of hinge	1772
3. Height to top of door	1805
4. Depth of case without door	625
5. Depth without handles	734
6. Depth incl. "Cafe" handles	802
Depth incl. "Design" handles	774
7. Total depth with door open 90°	1495
8. Width	1690
9. Width of open door (R)	590
10. Width of open door (L)	590
Recess dimensions	
A. Recess width	1696
B. Recess depth*	632
C. Recess height	1785